


C07-8C-B 版-卡槽拆換步驟

8C Controller Replacement

- I. 將綠色端子及相關線路拆除(圖一、圖二)

Dismantle all green terminal and cable, following Fig. 1 and Fig. 2.

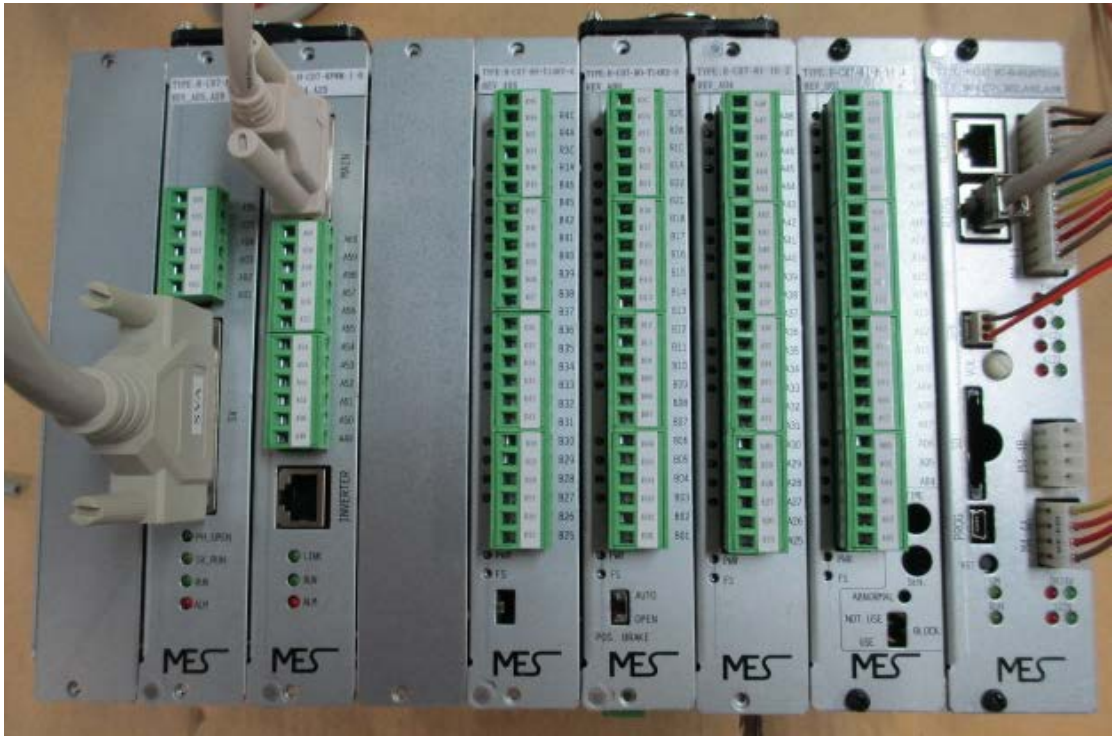

(圖一)
(Fig. 1)



(圖二)
(Fig. 2)

II. 將卡槽固定螺絲(共 4 支)放鬆及綠色接地線需拆除(圖三)

Dismantle 4 screws and cables. Please check the Fig. 3.



(圖三)

(Fig. 3)

III. 將有綠色端子的卡片拆下(圖四)

Dismantle all terminal with green. Please check Fig. 4.



(圖四)

(Fig. 4)

- IV. 將卡片拆下後的狀態(圖五)
Controller without cards.



(圖五)
(Fig. 5)

- V. 回復時，請依步驟：IV→III→ II→ I
If you would like to assemble those components, please follow step backward.(IV,III, II, I)